

# T11 7,500 LITRE



Offshore Portable Tank



7,500 LITRE



A Marmon/Berkshire Hathaway Company

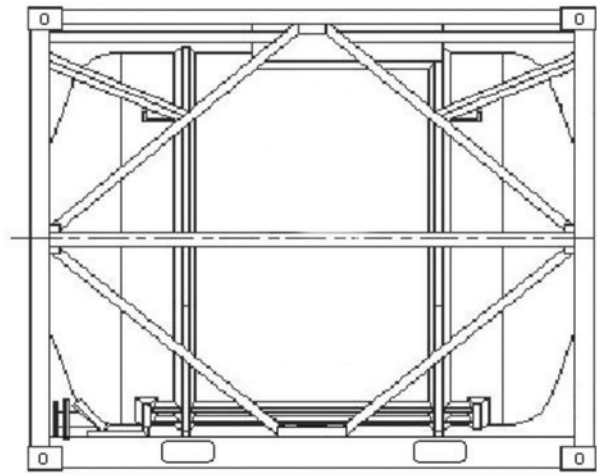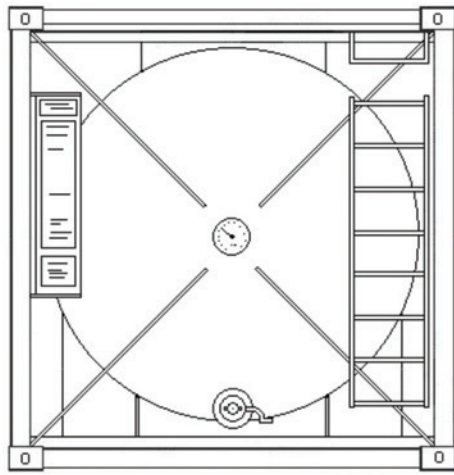

# T11 7,500 LITRE

## Offshore Portable Tank (-20 °C) or (-40 °C)

### General Specification

Dimensions	mm	ft-in
Length	2,991	9' 10"
Width	2,438	8' 0"
Height	2,438	8' 0"

Capacity	Litres	Gallons	US Gallons
	7,567	1,665	2,000

**Shell Material** EN 10028-7 1.4401/04 (316/316L) Stainless Steel

**Pressures**  
 Working = 4.0 Bar (58.0 psi)  
 Test = 6.0 Bar (87.0 psi)  
 Vacuum = 0.4 Bar (5.8 psi)

**Design Temp** -20°C to +130°C or -40°C to +130°C

**Design Code** ASME VIII Division 1 where applicable

Weights	kgs
Tare	2,250
Max. Payload	10,750
Max. Gross	13,000

Frame	Description
Forklift Pockets	Loaded lift fork pockets – 300mm x 100mm, 1500mm centres.
Lifting Lugs	Fitted with lifting sling and shackles to DNV 2.7-1.
<b>Fittings</b>	
Manlid	Fort Vale 500mm, hinged with 8 point fastenings.
Airlines	1" BSP top mounted ball valve leading to secondary ball valve operable from ground level and c/w 1" BSP end connector and retained dustcap.
Vent	Top positioned 1 1/2" BSP Fort Vale ball valve c/w provision for pressure gauge, with retained dust cap.
Bottom Outlet	Fort Vale 3" NB Fort Vale 45 degrees footvalve, 3" butterfly valve, 3" BSP connection and retained dustcap. Remote closure system fitted.
Safety Relief Valve	2 1/2" BSP Super Maxi pressure / vacuum valve set at 4.4 bar/ 0.21 bar (63.8 /3 psi) with flame gauze fitted.
Level Gauge	Bayham level gauge fitted to tank body in line with bottom outlet.

**Steam Heating** 4 run steam heating system.  
**Pressures** 4.0 bar working, 6.0 bar test.  
**Connections** 1" BSP inlet, 3/4" BSP outlet, each with retained dust cap.

**Approvals** UN Portable tank (T11) IMDG, ADR/RID, DNV2.7-1(2013), BS EN12079, CFR, UIC, TIR, CSC.



Note: The above information is an average representation of technical data. Please consult your EXSIF OCS representative for more specific data.

Visit our website [www.exsif-ocs.com](http://www.exsif-ocs.com)

Tel: + 44 (0) 1224 894643 Contact: [info@exsif-ocs.com](mailto:info@exsif-ocs.com)