

T 7 4,000 LITRE




Offshore Portable Tank



4,000 LITRE



A Marmon/Berkshire Hathaway Company

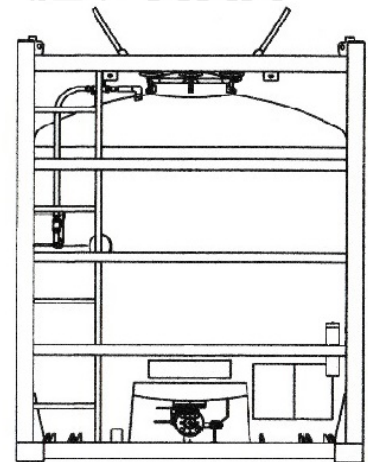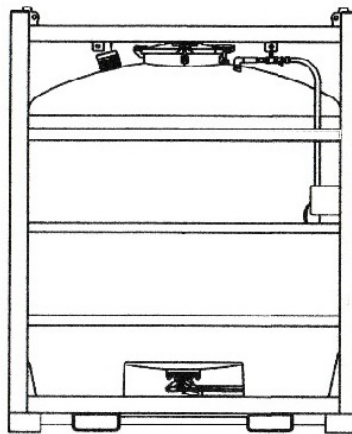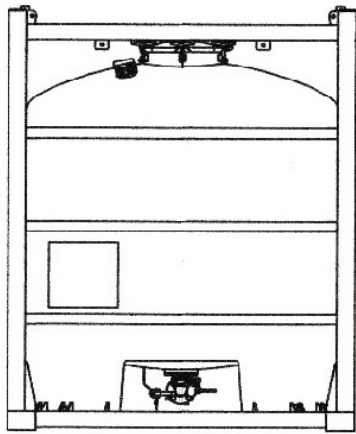

T 7 4,000 LITRE

Offshore Portable Tank (-20 °C) or (-40 °C)

General Specification

Dimensions	mm	ft-in	
Length	1,995	6' 6"	
Width	1,995	6' 6"	
Height	2,571	8' 5"	
Capacity	Litres	Gallons	US Gallons
	4,000	880	1,056
Shell Material	EN 1.4401/04 (316/316L) Stainless Steel		
Pressures	Working = 2.67 Bar (38.72 psi) Test = 4.0 Bar (58.0 psi) Vacuum = 0.21 Bar (3.045 psi)		
Design Temp	-20°C to +85°C or -40°C to +85°C		
Design Code	ASME VIII Division 1 where applicable		
Weights	kgs		
	-20°C	-40°C	
Tare	1,550	1,600	
Max. Payload	6,450	6,400	
Max. Gross	8,000	8,000	

Frame	Forklift Pockets Loaded lift fork pockets - 250mm x 100mm, 1000mm centres
Lifting Lugs	Fitted with lifting sling and shackles to DNV 2.7-1.
Fittings	Manlid Fort Vale 460mm, hinged with 6 point fastenings.
Airlines	¾" BSP lockable top mounted ball valve leading to secondary ¾" ball valve operable from ground level and c/w ¾" NPT end connector and retained dustcap.
Bottom Outlet	Fort Vale 3" bottom outlet pad c/w 3" 90 degree highlift footvalve reduced down to 2" pipe extending to flanged 2" ball valve c/w a 2" NPT spigot with retained dustcap. Bottom outlet c/w ¾" Sample point c/w ball valve, end connector and retained dustcap.
Safety Relief Valve	2 ½" BSP Super Maxi pressure / vacuum valve set at 3.33 bar/ 0.21 bar (48.3/3 psi) with flame gauze fitted.
Level Gauge	Bayham level gauge fitted to tank body adjacent to bottom outlet.

Steam Heating	None
Approvals	T7 UN Portable tank (covering IMDG, ADR/RID, CFR) DNV2.7-1, BS EN12079.



Note: The above information is an average representation of technical data. Please consult your EXSIF OCS representative for more specific data.

Visit our website www.exsif-ocs.com

Tel: + 44 (0) 1224 894643 Contact: info@exsif-ocs.com